




Valve Regulated Lead Acid Battery

Discover[®] AGM Series VRLA Industrial Batteries provide superior high integrity and reliability for commercial, industrial, and private applications. The maintenance-free Valve Regulated Lead Acid (VRLA) construction make Discover[®] Standard AGM Series Batteries the definitive choice for mobility and Home Medical Equipment (HME), solar and renewable energy, electronics and security, marine and RV, and utility applications.


MECHANICAL DRAWINGS

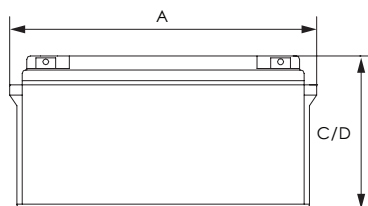



Terminal (F21)



Optional Terminal (F17)



Optional Terminal (F12)



MECHANICAL SPECIFICATIONS

| | | |
|------------------|----------------|----------|
| Length (A) | 12.0 in | 306 mm |
| Width (B) | 6.65 in | 169 mm |
| Height (C) | 8.19 in | 208 mm |
| Total Height (D) | 8.35 in | 212 mm |
| Weight | 57.3 lbs | 26.0 kgs |
| Terminal (Opt'l) | F21 (F17, F12) | |
| Cells | 6 | |
| Electrolyte | AGM | |

NOTE: There is a tolerance of +/-2%.

TERMINAL TORQUE: Please refer to our document, located in the Resources webpage (discoverbattery.com/resources).

CAUTION*: Extra considerations must be given to depths of discharge, operating voltages and currents when designing systems for use at maximum temperatures.

ELECTRICAL SPECIFICATIONS

| | |
|---------------------------|-------------------------------|
| Voltage | 12 V |
| Internal Resistance | 6 mΩ |
| Short Circuit 20°C (68°F) | - |
| 20 HR | 100 Ah |
| 10 HR | 90 Ah |
| 5 HR | 81 Ah |
| 1 HR | 60 Ah |
| 15 MIN | - |
| Charge Temperature | -10°C (14°F) to 50°C (122°F) |
| Discharge Temperature | -40°C (-40°F) to 50°C (122°F) |
| Maximum Discharge* | -40°C (-40°F) to 60°C (140°F) |

DISCHARGE CONSTANT CURRENT (AMPERES AT 25°C/77°F)

| Final Voltage (VPC) | 5 MIN | 10 MIN | 15 MIN | 30 MIN | 1 HR | 3 HR | 5 HR | 10 HR | 20 HR |
|---------------------|-------|--------|--------|--------|------|------|------|-------|-------|
| 1.60V | 300 | 205 | 165 | 96.8 | 60.3 | 96.8 | 60.3 | 9.40 | 5.10 |
| 1.65V | 276 | 194 | 157 | 92.6 | 57.9 | 92.6 | 57.9 | 9.35 | 5.09 |
| 1.70V | 252 | 182 | 148 | 88.2 | 55.4 | 88.2 | 55.4 | 9.30 | 5.08 |
| 1.75V | 225 | 169 | 139 | 83.6 | 52.8 | 83.6 | 52.8 | 9.20 | 5.06 |
| 1.80V | 198 | 154 | 129 | 78.8 | 52.0 | 78.8 | 52.0 | 9.00 | 5.00 |

DISCHARGE CONSTANT POWER (WATTS AT 25°C/ 77°F)

| Final Voltage (VPC) | 5 MIN | 10 MIN | 15 MIN | 30 MIN | 45 MIN | 1 HR | 2 HR | 3 HR | 5 HR |
|---------------------|-------|--------|--------|--------|--------|------|------|------|------|
| 1.60V | 528 | 372 | 304 | 186 | 138 | 117 | 68.2 | 48.4 | 33.8 |
| 1.65V | 491 | 353 | 299 | 180 | 134 | 115 | 67.0 | 47.8 | 33.6 |
| 1.70V | 454 | 335 | 290 | 176 | 132 | 113 | 65.8 | 47.3 | 33.3 |
| 1.75V | 419 | 317 | 279 | 170 | 129 | 110 | 64.6 | 46.7 | 33.2 |
| 1.80V | 381 | 296 | 270 | 164 | 126 | 107 | 63.9 | 45.9 | |

BENEFITS & FEATURES

Optimized lead calcium plate technology deliver high power density and consistent performance.

Special grid alloy and paste formula to reduce gassing and self-discharge.

Sealed valve regulated non-spillable maintenance-free technology.

99% gas recombination for extended life in float or cyclic applications.

Multiple battery terminal options and carrying handles.

UL924 recognized flame arresting low pressure safety vents.

Flame retardant ABS case and cover with UL94 V0 rating available.

Up to 12 year design life in float service models.

98% recyclable.

Classified as a non-spillable battery and is not restricted for transportation by:

- Air (IATA/ICAO provision 67)
- Ground (STB, DOT-CFR-HMR49)
- Water (per IMDG amendment 27)

CERTIFIED QUALITY

Discover[®] and its facilities and products are tested and certified to multiple standards:

- ISO, UL, CE, and QS standards
- ETTTS Germany
- Euro Bat classification for Environmental Stewardship Standards

Designed in accordance with and published in compliance with applicable BCI, IEC and BS EN standards, including:

- IEC60896-21/22
- BS EN 60254-1:2005
- AS/NZS 4029.2:2000



CHARGE AND DISCHARGE


| Max Charge / Discharge Currents | Peak (5 seconds) | Peak (10 seconds) | Max Continuous |
|---------------------------------|------------------|-------------------|----------------|
| Charge | 1c20 | 0.75c20 | 0.25c20 |
| Discharge | 15c20 | 10c20 | 0.5c20 |

Note 1 - Float (Stand-By) Use: Hold a constant voltage of 2.25vpc to 2.30vpc continuously. When held at this voltage, the battery will seek its own current level and maintain itself in a fully charged condition.


Note 2 - Cyclic Use: Limit initial currents to 0.25C20 amps. Charge until battery voltage reaches 2.40 to 2.45vpc. Hold at 2.40 to 2.45vpc until current drops to under 0.01C20 amps. Battery is fully charged under these conditions, and charger should be disconnected or switched to "float" voltage.

Note 3 - Temperature Coefficient: For temperatures below 25°C, adjust +0.005VPC/°C (or 0.003VPC per °F). For temperatures above 25°C, adjust -0.005VPC/°C (or 0.003VPC per °F).


DISCHARGE CHARACTERISTICS

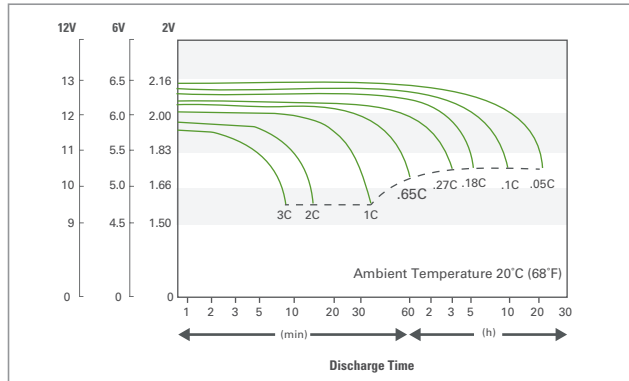


SELF-DISCHARGE CHARACTERISTICS

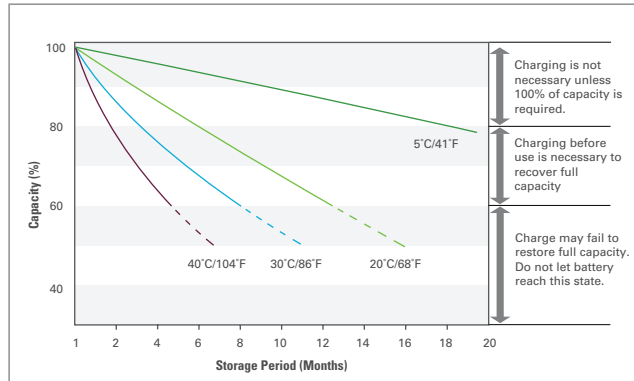


LIFE CHARACTERISTICS IN STAND-BY USE

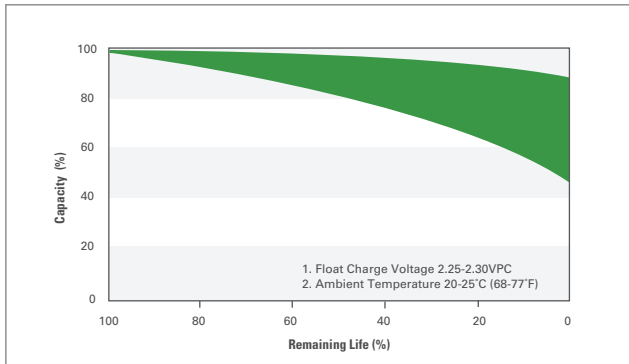


LIFE CHARACTERISTICS IN CYCLIC USE (CYCLIC MODELS ONLY)

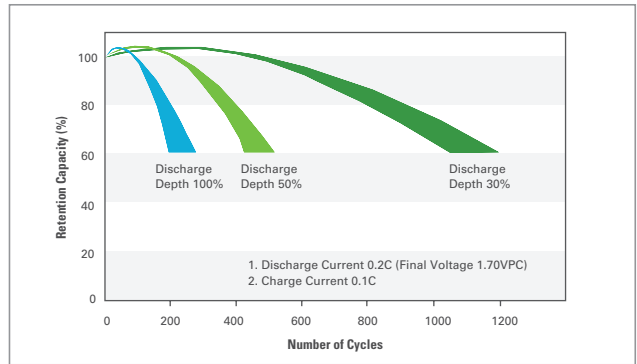


TEMPERATURE EFFECTS ON CAPACITY

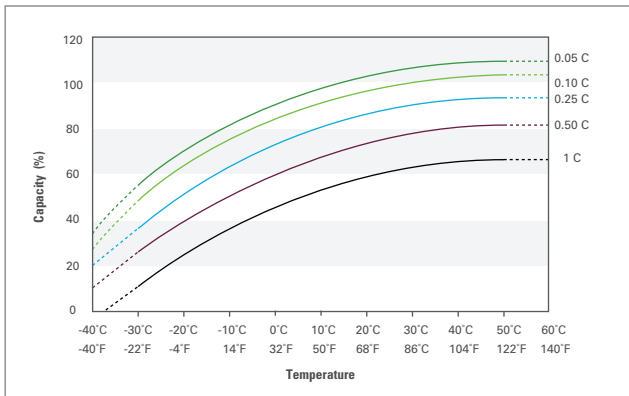

TEMPERATURE EFFECTS ON FLOAT LIFE

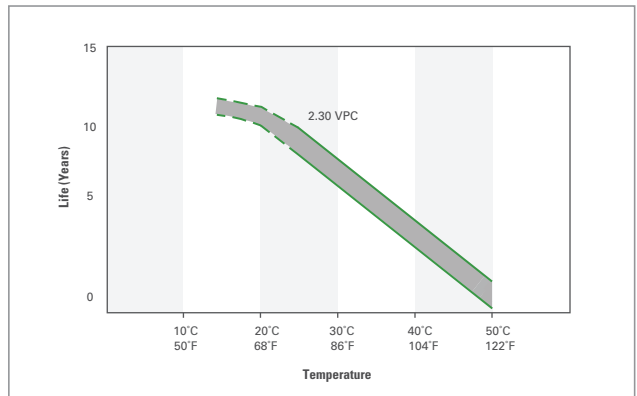


STANDBY/FLOAT APPLICATIONS

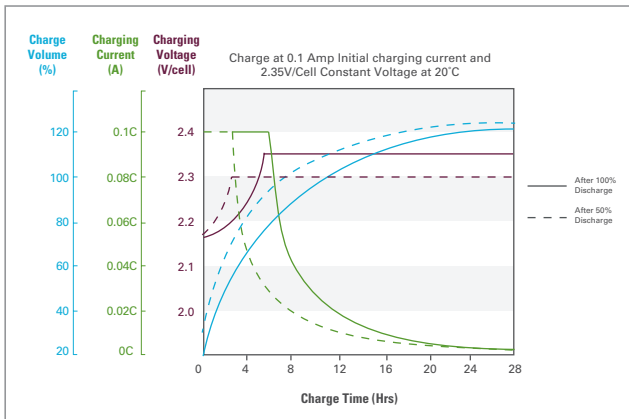

See Note 1

CYCLIC APPLICATIONS

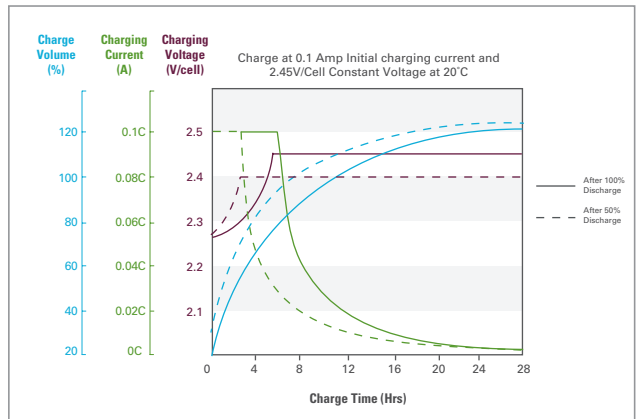

See Note 2